



United Technologies


If the *Standard* is the Flame-Monitor™ ...

For the past 20 years, from the introduction through the continuous improvement of the Flame-Monitor system, Fireeye has continually set new standards in the development of burner controls. With the use of microprocessors, Fireeye has brought a new level of intelligence into the operation of a burner. Controls have become smarter, more accurate, and more reliable resulting in more dependable operation. Using digital signal processing techniques, the operation of a burner with a Fireeye Flame-Monitor control is now less dependent on environmental conditions that can lead to wide and undesirable operating margins.

The Flame-Monitor is the benchmark by which all other burner controls are measured.



... then *Perfection* is BurnerLogix™

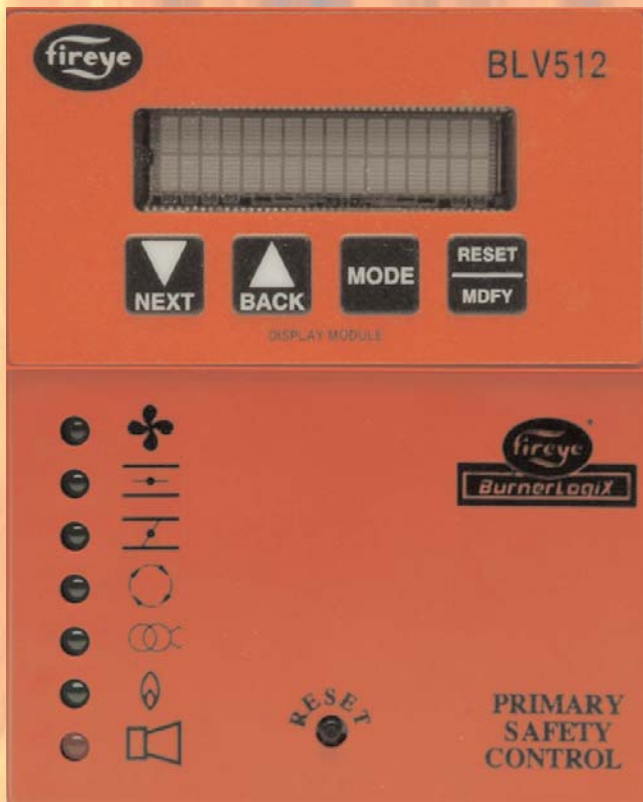

- Smaller footprint saves space
- Bright vacuum fluorescent display
- SMART LED's for status and diagnostics
- Keypad configurable parameters
- Expanded keypad functions
- Built-in language selection
- Plug-in programmer modules
- Expanded programmer functions
- Pigtail pre-wired wiring base available
- Din rail mount
- Enhanced communications
- International approvals

A Burner's Favorite Control



PRIMARY SAFETY CONTROLS

BurnerLogix Primary Safety Controls provide full function to basic control for all your application needs. BurnerLogix is a small and compact package filled with big features and huge benefits.

BurnerLogix™ Features Include:

- Keypad configured parameters
- Bright Vacuum Fluorescent Display
- NEM4 display mounting
- SMART LED's – provides status and lockout codes
- Keypad selectable languages
- Smaller size than E110
- Din rail mounting
- Pigtail or terminal block style wiring base
- Automatic 8 hour burn-in based on burner on time
- Valve proof of closure during standby and startup
- Enhanced communications, Adjustable baud rates
- 4-20 mA test jack signal
- Additional inputs and outputs

BurnerLogix™ Benefits Include:

- Fewer programmer modules to inventory
- Variable parameters help resolve all applications
- Reduced downtime, pinpoint diagnostics
- Cabinet mounting space reduced by 40% to 50%
- Wires pre-marked for ease of installation
- Added safety during idle or off periods
- Easily adapts into most building management systems
- Improved turndown control from Plant Master

Differentiators

1. Size – footprint reduced to 20 in² from 40 in² with pigtail wiring base
2. Size – footprint reduced to 28 in² from 40 in² with terminal block wiring base
3. Display – LCD, expanded cold temperature to -25° C
4. Display – VFD, increased brightness, operates to -40° C
5. Expanded keypad – forward and reverse keys simplifies parameter selection
6. Pre-wired base – ease of installation, no wires to cut
7. Smart LED's – provides status and lockout codes
8. 4-20 mA test jack signal
9. Keypad configurable parameters – reduced inventory
10. 8 hour burn-in based on burner on time – less chance of mistake
11. Proof of closure during standby
12. Terminal block wiring base – allows testing with control installed
13. Able to provide YP138 function
14. Additional inputs
15. Additional output for secondary valve, ignitor, etc
16. Adjustable baud rates for modbus communications



The Combustion Control Specialists

3 Manchester Road • Derry, NH 03038 USA
www.fireeye.com

BL-CS1
April, 2013